Mark Medice – 158 Laurel Lane – 412-721-9475

Deck Replacement – Scope of Work & Material Specifications

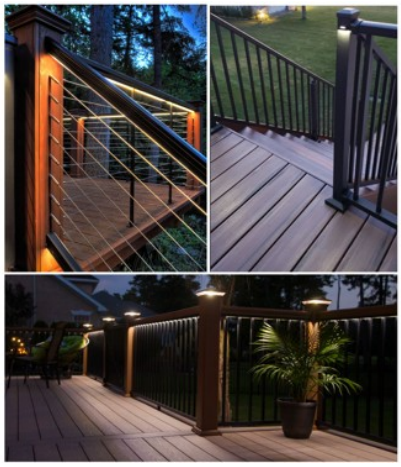

Existing deck – current condition

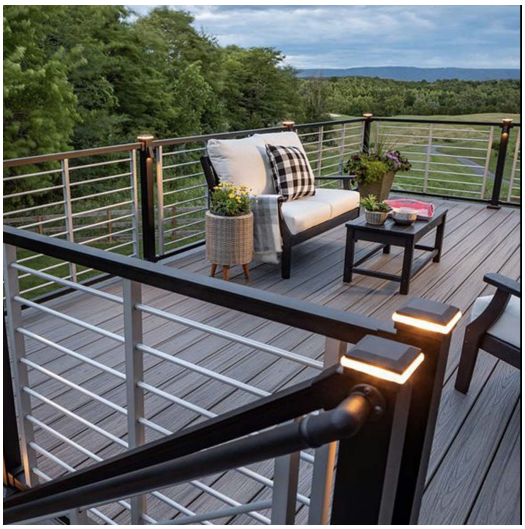

Railing style reference – horizontal metal with lighted post caps

1. Demolition

- Remove the entire existing deck surface, joist framing, base structure, and metal drainage system down to the existing footings and support posts
- Remove all existing railing along the three exposed sides (one 32’ front run and two 21’ side runs)
- Haul and dispose of all demolition debris from the job site

Note: Existing footings and support posts are to remain in place and be reused.

■ HOT TUB SUPPORT: The existing structural support for the hot tub must be preserved during demolition or reconstructed per the attached engineer’s report. Contractor shall review the engineer’s report prior to beginning any demolition work.

---

2. Framing & Preparation

- Inspect existing footings and support posts for structural integrity; notify owner of any concerns before proceeding
- Verify hot tub support structure is intact and compliant with the attached engineer's report; reconstruct if necessary per the report's specifications
- Install new pressure-treated joists at 12″ on-center spacing to support composite decking
- Run low-voltage electrical wiring through framing for integrated post and railing lighting
- Install DekDrain over-joist or under-joist drainage system to create a fully waterproof deck assembly with zero leaks to the area below

Requirement: The space beneath the deck must remain completely dry under all weather conditions.

---

3. Deck Design & Layout

- Construct a **picture frame-style deck layout** with perimeter border boards framing the entire deck surface
- Divide the deck into **two equal framed sections** (each approximately 16' x 21'), separated by a center seam board running the full 32' width
- Use **TimberTech Vintage Collection Mahogany, TimberTech Vintage Collection Tigerwood, Trex Spice Rum, or equivalent** dark-tone composite for all picture frame border boards and the center seam board
- Install all decking using the **TimberTech CONCEALoc Hidden Fastener System** (or equivalent) for a clean, screw-free surface
- Install a **lighted railing system** on all three exposed sides (one 32' front run and two 21' side runs)
- Coordinate railing post placement and lighting layout with the picture frame borders and center seam board for visual symmetry

---

4. Installation & Completion

- Install composite decking per the approved picture frame layout and design specifications above
- Install railing posts with internal wiring channels for lighting access
- Install lighted railing system and verify all lighting is fully operational
- Perform final walkthrough with owner to confirm workmanship and design intent
- Ensure all work complies with applicable local building codes and is ready for inspection

---

5. Railing Options Reference

The following are approved railing systems with integrated lighting, suitable for this project's 74-linear-foot railing perimeter (32' front, two 21' sides). Final selection to be confirmed with owner prior to ordering.

5a. Composite Railing

- **Trex** – Post cap lights, rail lights, riser lights; LightHub® plug-and-play system
- **TimberTech (AZEK)** – RadianceRail system with LED post caps and under-rail lighting
- **Fiberon** – Composite railing with optional integrated lighting accessories

5b. Cable Railing

- **Feeney** – DesignRail® aluminum system with LED strip and post accent lights
- **Viewrail** – Minimalist cable railing with optional LED lighting

5c. Metal (Aluminum) Railing

- **Westbury** – Magena Star LED options including post cap lights and sconces
- **Fortress** – Aluminum railing with integrated LED lighting
- **Barrette Outdoor Living** – Aluminum railing with optional LED accessories

---

6. Lighting Options Reference

Integrated Lighting:

- Post Cap Lights – Mounted atop railing posts for ambient downlighting
- Under-Rail Lights – Mounted beneath the top rail for subtle downward illumination
- LED Strip Lights – Continuous lighting along the full rail length

Sconce Lighting:

- Side-Mounted Fixtures – Attached to posts or walls for focused, decorative accent lighting

---

Attachment: Engineer's Report – Hot Tub Structural Support

Contractor must review this report in full before beginning work. Any questions regarding the hot tub support specifications should be directed to the owner.